


700 SERIES

- Size range: 2" to 16"
Consult factory for larger sizes
- Temperature range (-)60°F to +250°F
Consult factory for higher temperatures
- Conforms to all applicable standards
API 609, DIN 3202, ISO 5752, BS EN593
and FDA 21CFR177.2600
- ANSI B16.5 CLASS 150 Flange drilling
Other drillings available

Resilient Seated - Composite Body

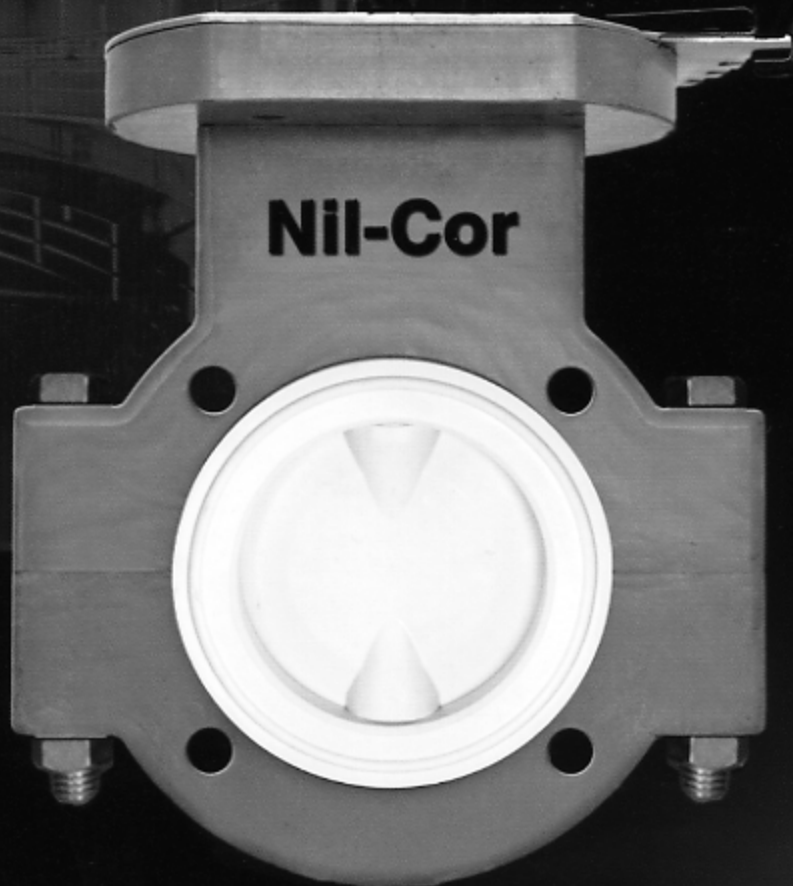


Nil-Cor

700 SERIES

Features

Resilient Seated - Composite Body

Strong
Light Weight
Zero Corrosion

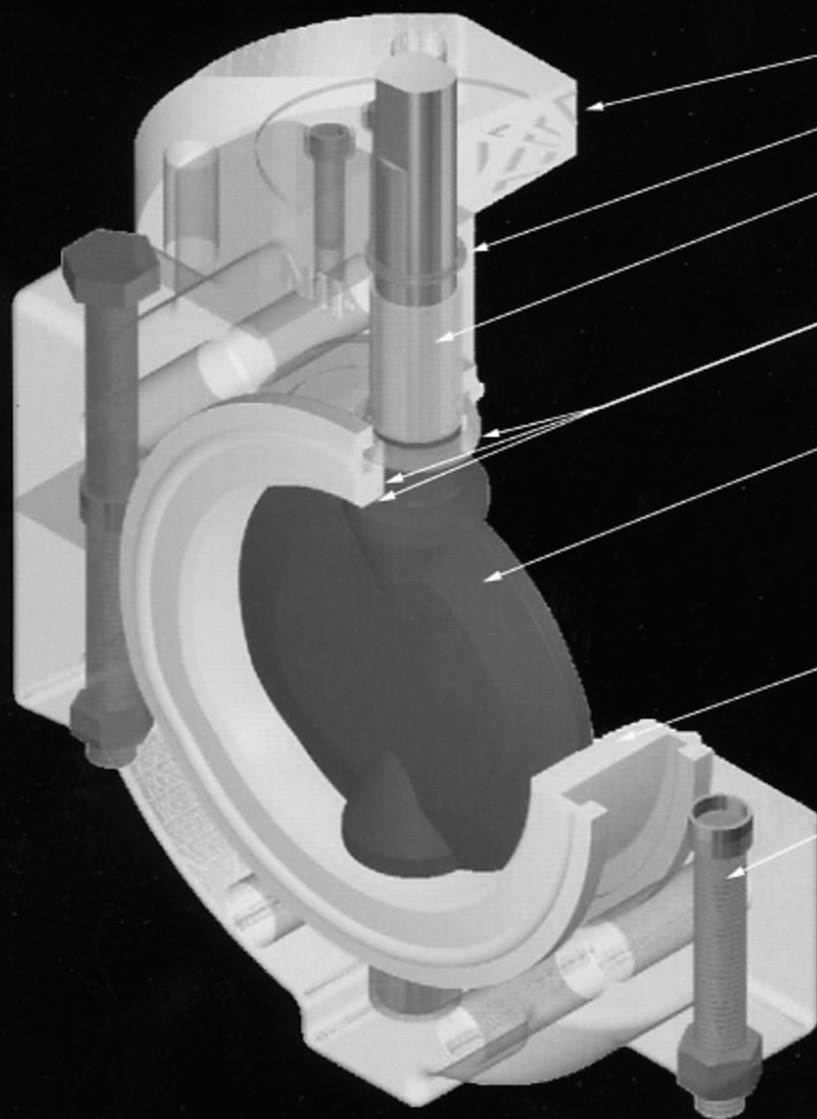

ISO 5211 mounting flange

Atmospheric stem seal

PTFE composite bearing
top & bottom never needs
lubrication

Energized Triple stem seals
top & bottom for leak free
service

Disc & stem are one piece casting
available in stainless steel or
food grade EPDM or Hypalon
encapsulated nickel plated DCI
with double "D" shaft drive.
Other disc materials available

Seat is thick food grade EPDM
meeting FDA 21CFR177.2600
or Hypalon elastomer locked into
valve body

Zinc Dichromate plated B7 fasteners

Valve body is manufactured from
advanced fiber reinforced vinyl ester
resin that is as strong as steel, 1/2 the
weight of ductile iron and will never
corrode. Guaranteed!

Body configurations include
flange wafer or lug style



Nil-Cor, LLC

12241 Rockhill Ave. N.E.
Alliance, OH, 44601
330-823-0500 - Fax (330) 821-6722
www.nilcor.com